


# HDPIPE80S

## Geperforeerd I profiel

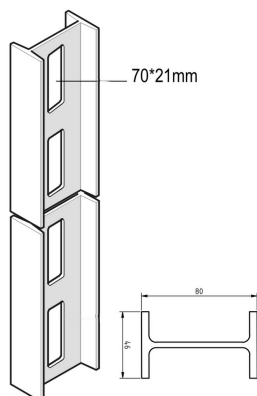

Stand. Uitv.		Hot-Dip							
Mat. Opt. PE		Duplex							
HD	Artikel	↕ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Eenh.
-	<b>HDPIPE80S</b>	80	46		6000	5,610	6	X	M

Weerstandsmoment:  $W_x = 19,96 \text{ cm}^3$ .  
Beschermdop in gele PVC: DOPIPE80.