


WKUMP41.41
Console MP41.41 v. hangsteun

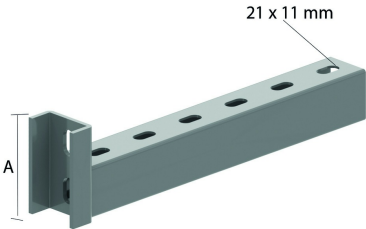

Stand. Uitv.	Elektrolytisch verzinkt
Mat. Opt.	Hot-Dip

	Max. Belasting (in daN)	A
WKUMP41.41.300	400	80
WKUMP41.41.400	300	80
WKUMP41.41.500	240	80
WKUMP41.41.600	175	80
WKUMP41.41.750	160	80
WKUMP41.41.1000	90	80

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD	WKUMP41.41.300	80	300			0,900	1	X	STK
HD	WKUMP41.41.400	80	400			1,100	1	X	STK
HD	WKUMP41.41.500	80	500			1,300	1	X	STK
HD	WKUMP41.41.600	80	600			1,500	1	X	STK
HD	WKUMP41.41.750	80	750			1,800	1	X	STK
HD	WKUMP41.41.1000	80	1000			2,300	1	X	STK

Te bestellen per volle verpakking.
Max. Belasting (in daN): Gelijkmatic verdeeld over de volledige breedte.
Bij gebruik met kabelladders, let op de lengte.