


L25

L-profiel

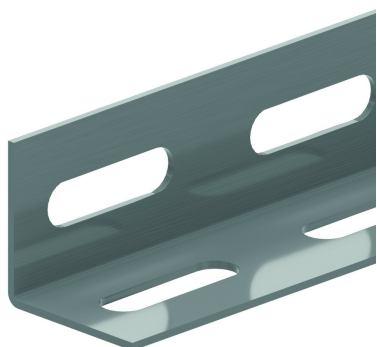

Sleufgaten: 25x7 mm met tussenstap 50 mm

Stand. Uitv.

Sendzimir

Mat. Opt.

Hot-Dip

Mat. Opt. PE

Poedercoating

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Eenh.
HD	L25.125	25	25	1,25	3000	0,400	3		M
HD	L25.200	25	25	2	3000	0,670	3		M