


P3300T10 Montageprofiel

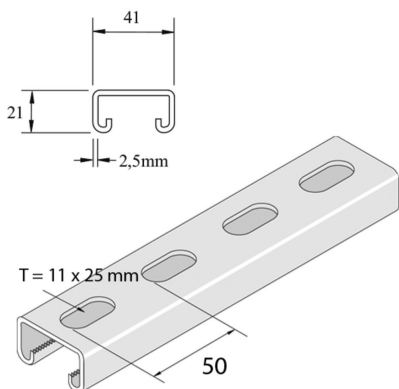

| Artikel | Afwerking | ↕ mm | ↔ mm | → ← mm | ↔↔ mm | kg/m | 📦 | Eenh. |
|----------------------|-----------|---------|---------|------------|----------|-------|---|-------|
| P3300TP10 | PO | 21 | 41 | 2,5 | 6000 | 1,680 | 6 | M |
| P3300T10 | ZP | 21 | 41 | 2,5 | 6000 | 1,706 | 6 | M |
| P3300T10DF | DF | 21 | 41 | 2,5 | 6000 | 1,706 | 6 | M |
| P3300TP10X3 | PO | 21 | 41 | 2,5 | 3000 | 1,679 | 3 | M |
| P3300T10X3 | ZP | 21 | 41 | 2,5 | 3000 | 1,760 | 3 | M |
| P3300T10X2000 | ZP | 21 | 41 | 2,5 | 2000 | 1,570 | 2 | M |
| P3300T10DFX3 | DF | 21 | 41 | 2,5 | 3000 | 1,706 | 3 | M |
| P3300TH10X3 | HG | 21 | 41 | 2,5 | 3000 | 1,760 | 3 | M |

Afkorting:

- PO = Onbehandeld
- ZP = Verzinkt
- HG = Hot-Dip Gegalvaniseerd
- DF = Defender

Legende afwerking

- PO = Onbehandeld
- ZP = Elektrolytisch verzinkt
- DF = Defender
- HG = Thermisch verzinkt