


P3301T10

Montageprofiel

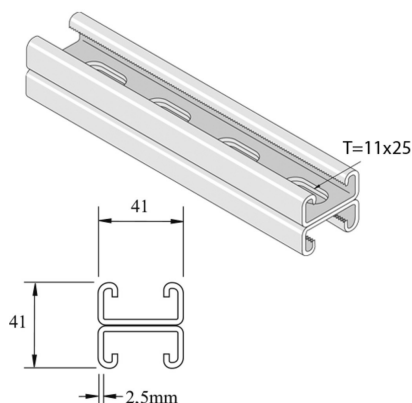

Artikel	Afwerking	↕ mm	↔ mm	→ ← mm	↔↔ mm	kg/m	📦	Eenh.
P3301T10P	PO	41	41	2,5	6000	3,590	150	M
P3301T10PG	PG	41	41	2,5	6000	3,422	6	M
P3301T10DF	DF	41	41	2,5	6000	3,530	6	M
P3301T10PGX3	PG	41	41	2,5	3000	3,422	3	M
P3301T10HX3	ZP	41	41	2,5	3000	3,530	75	M

Afkorting:

- ZP = Verzinkt
- HG = Hot-Dip Gegalvaniseerd
- DF = Defender

Legende afwerking

- PO = Onbehandeld
- PG = Voorverzinkt
- DF = Defender
- ZP = Elektrolytisch verzinkt