


# P3301T10

## Montageprofiel

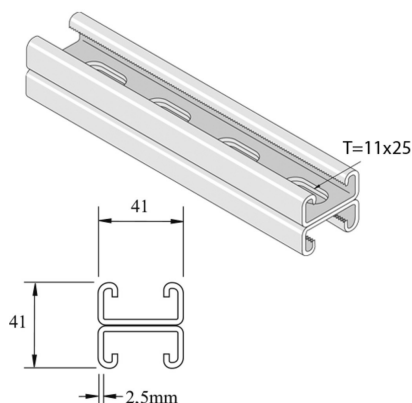

| Artikel             | Afwerking | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔↔<br>mm | kg/m  | 📦   | Eenh. |
|---------------------|-----------|---------|---------|------------|----------|-------|-----|-------|
| <b>P3301T10P</b>    | PO        | 41      | 41      | 2,5        | 6000     | 3,590 | 150 | M     |
| <b>P3301T10PG</b>   | ZP        | 41      | 41      | 2,5        | 6000     | 3,422 | 6   | M     |
| <b>P3301T10DF</b>   | DF        | 41      | 41      | 2,5        | 6000     | 3,530 | 6   | M     |
| <b>P3301T10PGX3</b> | ZP        | 41      | 41      | 2,5        | 3000     | 3,422 | 3   | M     |
| <b>P3301T10HX3</b>  | ZP        | 41      | 41      | 2,5        | 3000     | 3,530 | 75  | M     |

**Afkorting:**

- ZP = Verzinkt
- HG = Hot-Dip Gegalvaniseerd
- DF = Defender

**Legende afwerking**

- PO = Onbehandeld
- ZP = Elektrolytisch verzinkt
- DF = Defender