


## P5000T Montageprofiel

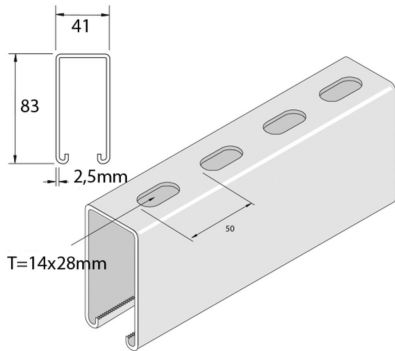

Artikel	Afwerking	↕ mm	↔ mm	→  ← mm	↔↔ mm	kg/m	📦	Eenh.
<b>P5000T</b>	ZP	83	41	2,5	6000	3,926	6	M
<b>P5000TX3</b>	-	83	41	2,5	3000	3,926	60	M
<b>P5000TH</b>	HG	83	41	2,5	6000	4,050	6	M

### Afkorting:

- PO = Onbehandeld
- ZP = Verzinkt
- HG = Hot-Dip Gegalvaniseerd

### Legende afwerking

- ZP = Elektrolytisch verzinkt
- HG = Thermisch verzinkt