


P5000T

Montageprofiel

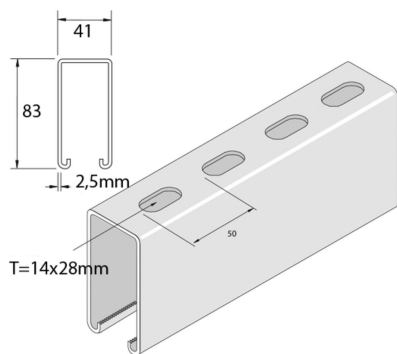

Stand. Uitv.		Sendzimir							
Mat. Opt.		Poedercoating							
HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Eenh.
-	P5000T	83	41	2,5	6000	4,050	6		M
-	P5000TX3	83	41	2,5	3000	3,926	60		M
-	P5000TH	83	41	2,5	6000	4,050	6		M

Afkorting:

- PO = Onbehandeld
- ZP = Verzinkt
- HG = Hot-Dip Gegalvaniseerd