


I6KLM125SB

Stijgbocht voor I6KLM125

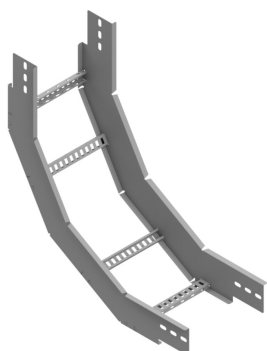

Radius: 600 mm

| Artikel | ↑ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Eenh. |
|-----------------------|---------|---------|------------|---------|--------|---|-------|
| I6KLM125SB150 | 125 | 150 | | | 5,189 | 1 | STK |
| I6KLM125SB200 | 125 | 208 | | | 5,347 | 1 | STK |
| I6KLM125SB300 | 125 | 308 | | | 5,662 | 1 | STK |
| I6KLM125SB400 | 125 | 408 | | | 5,977 | 1 | STK |
| I6KLM125SB450 | 125 | 450 | | | 6,134 | 1 | STK |
| I6KLM125SB500 | 125 | 508 | | | 6,291 | 1 | STK |
| I6KLM125SB600 | 125 | 608 | | | 6,606 | 1 | STK |
| I6KLM125SB750 | 125 | 750 | | | 7,079 | 1 | STK |
| I6KLM125SB800 | 125 | 800 | | | 7,237 | 1 | STK |
| I6KLM125SB900 | 125 | 900 | | | 7,551 | 1 | STK |
| I6KLM125SB1000 | 125 | 000 | | | 7,866 | 1 | STK |

Te bevestigen met:



Zelfborgende
kraagbout
I6RBK

Moer (DIN 934)
I6M

Minimum aantal bouten en moeren: 8 stuks.

Gebeitst en gepassiveerd.



Sluitring (DIN
125-1 A)
I6RO