



# TFCL110S

## TFCL met SIN

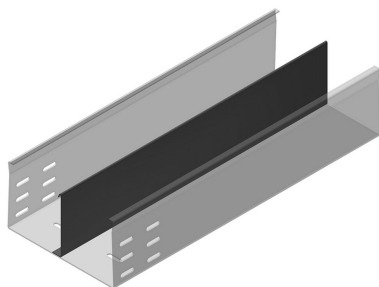

**Te bevestigen met:**



Koppelplaat  
V85.200

Stand. Uitv.		Sendzimir						
Mat. Opt.		Hot-Dip						
Mat. Opt. PE		Poedercoating						
HD Artikel	↕ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦 Stock	Eenh.	
HD <b>TFCL110.150.200S12</b>	110	150	2	3000	6,840	30	M	
HD <b>TFCL110.150.200S13</b>	110	150	2	3000	6,840	30	M	
HD <b>TFCL110.150.200S23</b>	110	150	2	3000	7,660	30	M	
HD <b>TFCL110.200.200S12</b>	110	200	2	3000	7,640	30	M	
HD <b>TFCL110.200.200S13</b>	110	200	2	3000	7,640	30	M	
HD <b>TFCL110.200.200S23</b>	110	200	2	3000	8,460	30	M	
HD <b>TFCL110.250.200S12</b>	110	250	2	3000	8,440	30	M	
HD <b>TFCL110.250.200S13</b>	110	250	2	3000	8,440	30	M	
HD <b>TFCL110.250.200S23</b>	110	250	2	3000	9,260	30	M	
HD <b>TFCL110.300.200S12</b>	110	300	2	3000	9,240	30	M	
HD <b>TFCL110.300.200S13</b>	110	300	2	3000	9,240	30	M	
HD <b>TFCL110.300.200S23</b>	110	300	2	3000	10,060	30	M	

S12: 1 scheidingsshot in het midden van de kabelgoot  
 S13: 1 scheidingsshot op 1/3 van de rand van de kabelgoot  
 S23: 2 scheidingschotten op 1/3 van de rand van de kabelgoot