


T

T-stuk

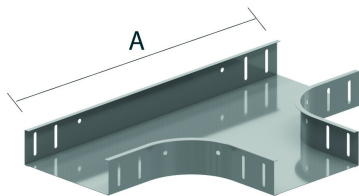

Ineenschuifbaar met de kabelbaan

Radius: 100 mm

Op aanvraag: Hoogte 35 mm - 85 mm - 110 mm

Stand. Uitv.

Sendzimir

Mat. Opt.

Mat. Opt. PE


Poedercoating

	50	75	100	150	200	300	400	500	600
A	458	483	508	558	608	708	808	908	1008

Te bevestigen met:



Zelfborgende
moer en bout
VM



Zelfborgende
moer en
kraagbout
VMK

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
-	T60.050	60	50			0,832	1	X	STK
-	T60.075	60	75			0,978	1	X	STK
-	T60.100	60	100			1,124	1	X	STK
-	T60.150	60	150			1,516	1	X	STK
-	T60.200	60	200			1,758	1	X	STK
-	T60.300	60	300			2,590	1	X	STK
-	T60.400	60	400			3,380	1	X	STK
-	T60.500	60	500			6,120	1	X	STK
-	T60.600	60	600			7,260	1	X	STK
-	ZMT60.050	60	50			1,265	1		STK
-	ZMT60.075	60	75			1,43	1		STK
-	ZMT60.100	60	100			1,595	1		STK
-	ZMT60.150	60	150			2,035	1		STK
-	ZMT60.200	60	200			2,31	1		STK
-	ZMT60.300	60	300			3,245	1		STK
-	ZMT60.400	60	400			4,29	1		STK
-	ZMT60.500	60	500			7,48	1		STK
-	ZMT60.600	60	600			8,91	1		STK

Minimum aantal bouten en moeren: 12 stuks.