


# AS

## Aftakstuk 90°

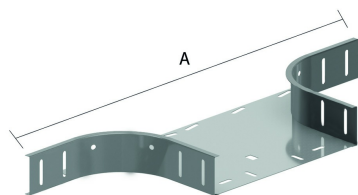

Ineenschuifbaar met de kabelbaan

Radius: 100 mm

Op aanvraag: Hoogte 35 mm - 85 mm - 110 mm

Stand. Uitv.

Sendzimir

Mat. Opt.

Mat. Opt. PE


Poedercoating

	50	75	100	150	200	300	400	500	600
A	458	483	508	558	608	708	808	908	1008

### Te bevestigen met:



Zelfborgende  
moer en bout  
VM



Zelfborgende  
moer en  
kraagbout  
VMK

HD	Artikel	↕ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
-	<b>AS60.050</b>	60	50			0,490	1	X	STK
-	<b>AS60.075</b>	60	75			0,530	1	X	STK
-	<b>AS60.100</b>	60	100			0,570	1	X	STK
-	<b>AS60.150</b>	60	150			0,650	1	X	STK
-	<b>AS60.200</b>	60	200			0,730	1	X	STK
-	<b>AS60.300</b>	60	300			0,880	1	X	STK
-	<b>AS60.400</b>	60	400			0,103	1	X	STK
-	<b>AS60.500</b>	60	500			1,524	1	X	STK
-	<b>AS60.600</b>	60	600			1,740	1	X	STK
-	<b>ZMAS60.100</b>	60	100			0,627	1	X	STK
-	<b>ZMAS60.050</b>	60	50			0,542	1	X	STK
-	<b>ZMAS60.075</b>	60	75			0,584	1	X	STK
-	<b>ZMAS60.150</b>	60	150			0,713	1	X	STK
-	<b>ZMAS60.200</b>	60	200			0,88	1	X	STK
-	<b>ZMAS60.300</b>	60	300			0,966	1	X	STK
-	<b>ZMAS60.400</b>	60	400			1,137	1	X	STK
-	<b>ZMAS60.500</b>	60	500			1,677	1	X	STK
-	<b>ZMAS60.600</b>	60	600			1,914	1	X	STK

Minimum aantal bouten en moeren: 8 stuks.

