


SLOS

Scheidingschot los

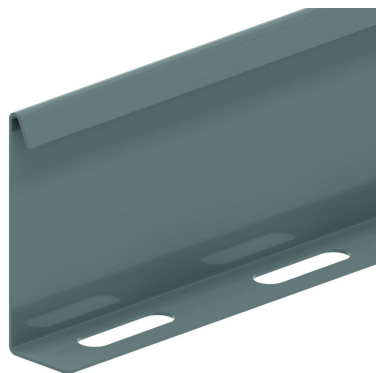

Stand. Uitv. Sendzimir

Mat. Opt.

Mat. Opt. PE


Poedercoating

| HD | Artikel | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/m | 📦 | Stock | Eenh. |
|----|------------------|---------|---------|------------|---------|-------|-----|-------|-------|
| - | SLOS35 | 28 | | | 3000 | 0,330 | 150 | X | M |
| - | SLOS60 | 53 | | | 3000 | 0,511 | 120 | X | M |
| - | SLOS85 | 78 | | | 3000 | 0,680 | 60 | X | M |
| - | SLOS110 | 103 | | | 3000 | 0,820 | 30 | X | M |
| - | ZMSLOS35 | 28 | | | 3000 | 0,257 | 150 | X | M |
| - | ZMSLOS60 | 60 | | | 3000 | 0,397 | 120 | X | M |
| - | ZMSLOS85 | 78 | | | 3000 | 0,529 | 60 | | M |
| - | ZMSLOS110 | 103 | | | 3000 | 0,638 | 30 | X | M |

Te bevestigen met:



Zelfborgende
bolkopbout
RB



Glijmoer voor
draagprofielen
PNP06-
PNP12A

Bevestigingsmateriaal: 1 per meter.