


KBSCCL60.6

Cable Tray Clickable

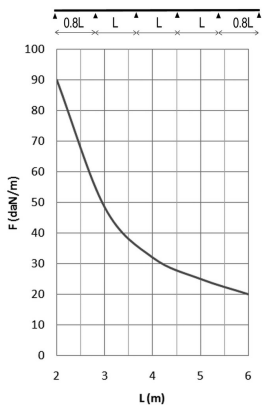

Clicking ends
Alternative perforations
Return flanges

Reference	Finish	mm	mm	mm	mm	kg/m	Unit	Unit
KBSCCL60.075.10.6	SZ	60	75	1	6000	1,324	60	M
KBSCCL60.100.10.6	SZ	60	100	1	6000	1,535	60	M
KBSCCL60.150.10.6	SZ	60	150	1	6000	1,869	30	M
KBSCCL60.200.10.6	SZ	60	200	1	6000	2,199	30	M
KBSCCL60.300.10.6	SZ	60	300	1	6000	2,853	30	M
KBSCCL60.400.10.6	SZ	60	400	1	6000	3,545	30	M
ZMKBSCCL60.075.10.6	DF	60	75	1	6000	1,324	60	M
ZMKBSCCL60.100.10.6	DF	60	100	1	6000	1,535	60	M
ZMKBSCCL60.150.10.6	DF	60	150	1	6000	1,869	30	M
ZMKBSCCL60.200.10.6	DF	60	200	1	6000	2,199	30	M
ZMKBSCCL60.300.10.6	DF	60	300	1	6000	2,853	30	M
ZMKBSCCL60.400.10.6	DF	60	400	1	6000	3,545	30	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

FEATURES

- Clickable.
- The simplest jointing system, with a single movement.
- Rapid - Just click and ready for the next joint. Immediate alignment at the same time.
- Strong - As strong as a bolted joint.
- Reliable - Maximum load with snap-fit joint. Multiple jointing options available.
- Cost-effective - Working faster results in immediate time and cost savings.
- High standard - Wide and complete range of accessories available.

Etched perforations for:

- better stability
- extra load-bearing capacity
- better cooling

Longitudinal and transverse perforations for:

- better fixing to the support
- convenient cable bundling

Additional equipotential bonding available by 1. snap-fit joint, 2. bolted joint, 3. push-through lip in the bottom.

Legend finish

- SZ = Sendzimir
- DF = Defender