


# COMEGACLU170

## Open suspension bracket universal

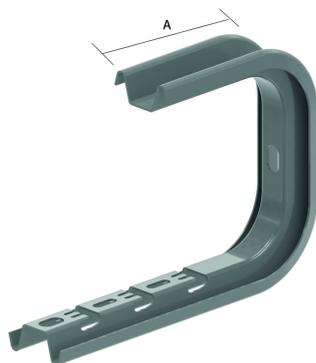

Useful for direct mounting to the ceiling or with threaded rod TIM8 or TIM10.

	Max. load (in daN)	A
COMEGACLU170.150	60	145
COMEGACLU170.200	60	145
COMEGACLU170.300	50	195
COMEGACLU170.400	40	245

Reference	Finish	↑ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unit
<b>ZMCOMEGACLU170.150</b>	DF	170	182	1,5		0,460	12	STK
<b>ZMCOMEGACLU170.200</b>	DF	170	232	1,5		0,540	12	STK
<b>ZMCOMEGACLU170.300</b>	DF	170	332	1,5		0,700	6	STK
<b>ZMCOMEGACLU170.400</b>	DF	170	432	1,5		0,860	6	STK

Fixing of the cable tray by VM6.20.  
Use the VOMEGA to avoid compression of the profile.  
Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

Do not use with: VFUL30.065, VFUL35.150, VFU35.150, VFUL 60.050

**Legend finish**  
- DF = Defender